


## Anillo de Retención Omega Externo Pulgadas



Referencias del mercado	
GFS	2100
Beneri	2100-5100
Rotor	SH
Truarc	5100
Anderton	N1400

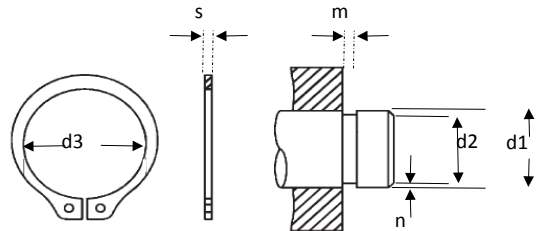


Medida	Flecha (d1)		Anillo		Ranura		
	Decimal (d1)	Fracción (d1)	Diametro interno (d3)	Espesor (s)	Diametro (d2)	Profundidad (n)	Espesor (m)
25	0.250	1/4	0.225	+ .002 - .005	0.230	0.010	0.029
27	0.276	-----	0.250		0.255	0.010	
28	0.281	9/32	0.256		0.261	0.010	
31	0.312	5/16	0.281		0.290	0.011	
34	0.344	11/32	0.309		0.321	0.011	
35	0.354	23/64	0.320		0.330	0.012	
37	0.375	3/8	0.338		0.352	0.012	
39	0.394	25/64	0.354		0.369	0.012	
40	0.406	13/32	0.366		0.382	0.012	
43	0.438	7/16	0.395		0.412	0.013	
46	0.469	15/32	0.428		0.443	0.013	
50	0.500	1/2	0.461		0.468	0.016	
55	0.551	-----	0.509	0.519	0.016		
56	0.562	9/16	0.521	0.530	0.016		
59	0.594	19/32	0.550	0.559	0.017		
62	0.625	5/8	0.579	0.588	0.018		
66	0.669	43/64	0.621	0.629	0.020		
68	0.688	11/16	0.635	0.646	0.021		
75	0.750	3/4	0.693	0.704	0.023		
78	0.781	25/32	0.722	0.733	0.024		
81	0.812	13/16	0.751	0.762	0.025		
84	0.844	27/32	0.780	0.791	0.026		
87	0.875	7/8	0.810	0.821	0.027		
93	0.938	15/16	0.867	0.882	0.028		
98	0.984	63/64	0.910	0.926	0.029		
100	1.000	1"	0.925	0.940	0.030		
102	1.023	1-1/32	0.946	0.961	0.031		
106	1.062	1-1/16	0.982	0.998	0.032	+ .004 - .000	
112	1.125	1-1/8	1.041	1.059	0.033		
118	1.188	1-3/16	1.098	1.118	0.035		
125	1.250	1-1/4	1.156	1.176	0.037		
131	1.312	1-5/16	1.214	1.232	0.040		
137	1.375	1-3/8	1.272	1.291	0.042		
143	1.438	1-7/16	1.333	1.350	0.044		
150	1.500	1-1/2	1.387	1.406	0.047		



## Anillo de Retención Omega Externo Pulgadas



Referencias del mercado	
GFS	2100
Beneri	2100-5100
Rotor	SH
Truarc	5100
Anderton	N1400

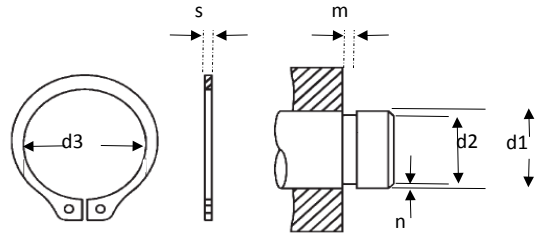


Medida	Flecha (d1)		Anillo			Ranura				
	Decimal (d1)	Fracción (d1)	Diametro interno (d3)	Espesor (s)	Diametro (d2)	Profundidad (n)	Espesor (m)			
156	1.562	1-9/16	1.446	0.062	+ .013 - .020	+ .005	1.468	0.047	0.068	+ .004 - .000
162	1.625	1-5/8	1.503				1.529	0.048		
168	1.688	1-11/16	1.560				1.589	0.049		
175	1.750	1-3/4	1.618				1.650	0.050		
177	1.772	-----	1.637				1.669	0.051		
181	1.812	1-13/16	1.675				1.708	0.052		
187	1.875	1-7/8	1.735				1.769	0.053		
196	1.969	1-31/32	1.819				1.857	0.056		
200	2.000	2"	1.850				1.886	0.057		
206	2.062	2-1/16	1.906				0.078	+ .015 - .025		
212	2.125	2-1/8	1.964	2.003	0.061					
215	2.156	2-5/32	1.993	2.032	0.062					
225	2.250	2-1/4	2.081	2.120	0.065					
231	2.312	2-5/16	2.139	2.178	0.067					
237	2.375	2-3/8	2.197	2.239	0.068					
243	2.438	2-7/16	2.255	2.299	0.069					
250	2.500	2-1/2	2.313	2.360	0.070					
255	2.559	2-9/16	2.377	2.419	0.070					
262	2.625	2-5/8	2.428	2.481	0.072					
268	2.688	2-11/16	2.485	2.541	0.073					
275	2.750	2-3/4	2.543	0.093	+ .020 - .030	+ .006	2.602	0.074	0.103	+ .005 - .000
287	2.875	2-7/8	2.659				2.721	0.077		
293	2.938	2-15/16	2.717				2.779	0.079		
300	3.000	3"	2.775				2.838	0.081		
306	3.062	3-1/16	2.832				2.898	0.082		
312	3.125	3-1/8	2.892				2.957	0.084		
315	3.156	3-5/32	2.920				2.986	0.085		
325	3.250	3-1/4	3.006				3.076	0.087		
334	3.346	3-11/32	3.092				3.166	0.090		
343	3.438	3-7/16	3.179				3.257	0.090		
350	3.500	3-1/2	3.237	3.316	0.092					
354	3.543	3-25/64	3.277	0.109	+ .003	+ .006	3.357	0.093	0.120	+ .005 - .000
362	3.625	3-5/8	3.352				3.435	0.095		
368	3.688	3-11/16	3.410				3.493	0.097		



## Anillo de Retención Omega Externo Pulgadas



Referencias del mercado	
GFS	2100
Beneri	2100-5100
Rotor	SH
Truarc	5100
Anderton	N1400

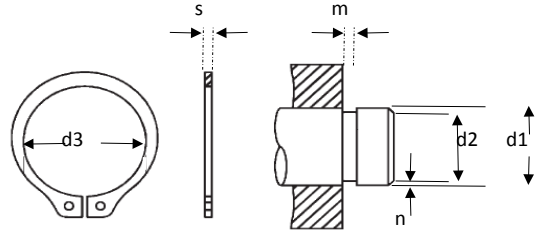

Medida	Flecha (d1)		Anillo				Ranura				
	Decimal (d1)	Fracción (d1)	Diametro interno (d3)	Espesor (s)		Diametro (d2)	Profundidad (n)		Espesor (m)		
375	3.750	3-3/4	3.468	+0.020 - .030	0.109	+ - .003	+ - 0.006	0.099	0.120	+ .005 - .000	
387	3.875	3-7/8	3.584								
393	3.938	3-15/16	3.642								
400	4.000	4"	3.700								
412	4.125	4-1/8	3.800								
425	4.250	4-1/4	3.989								
437	4.375	4-3/8	4.106								
450	4.500	4-1/2	4.223								
475	4.750	4-3/4	4.458								
500	5.000	5"	4.692								
525	5.250	5-1/4	4.927	+0.02 - .04	0.125	+ - .004	+ - .007	0.110	0.139	+ .006 - .0	
550	5.500	5-1/2	5.162								
575	5.750	5-3/4	5.396								
600	6.000	6"	5.631								
625	6.250	6-1/4	5.866	+0.02 - .05	0.156	+ - .005	+ - .008	0.132	0.174	+ .008 - .000	
650	6.500	6-1/2	6.100								
675	6.750	6-3/4	6.335								
700	7.000	7"	6.570								
725	7.250	7-1/4	6.775		0.187		+ - .005	+ - .008	0.154		0.209
750	7.500	7-1/2	7.009								
775	7.750	7-3/4	7.243								
800	8.000	8"	7.478								